RoHS

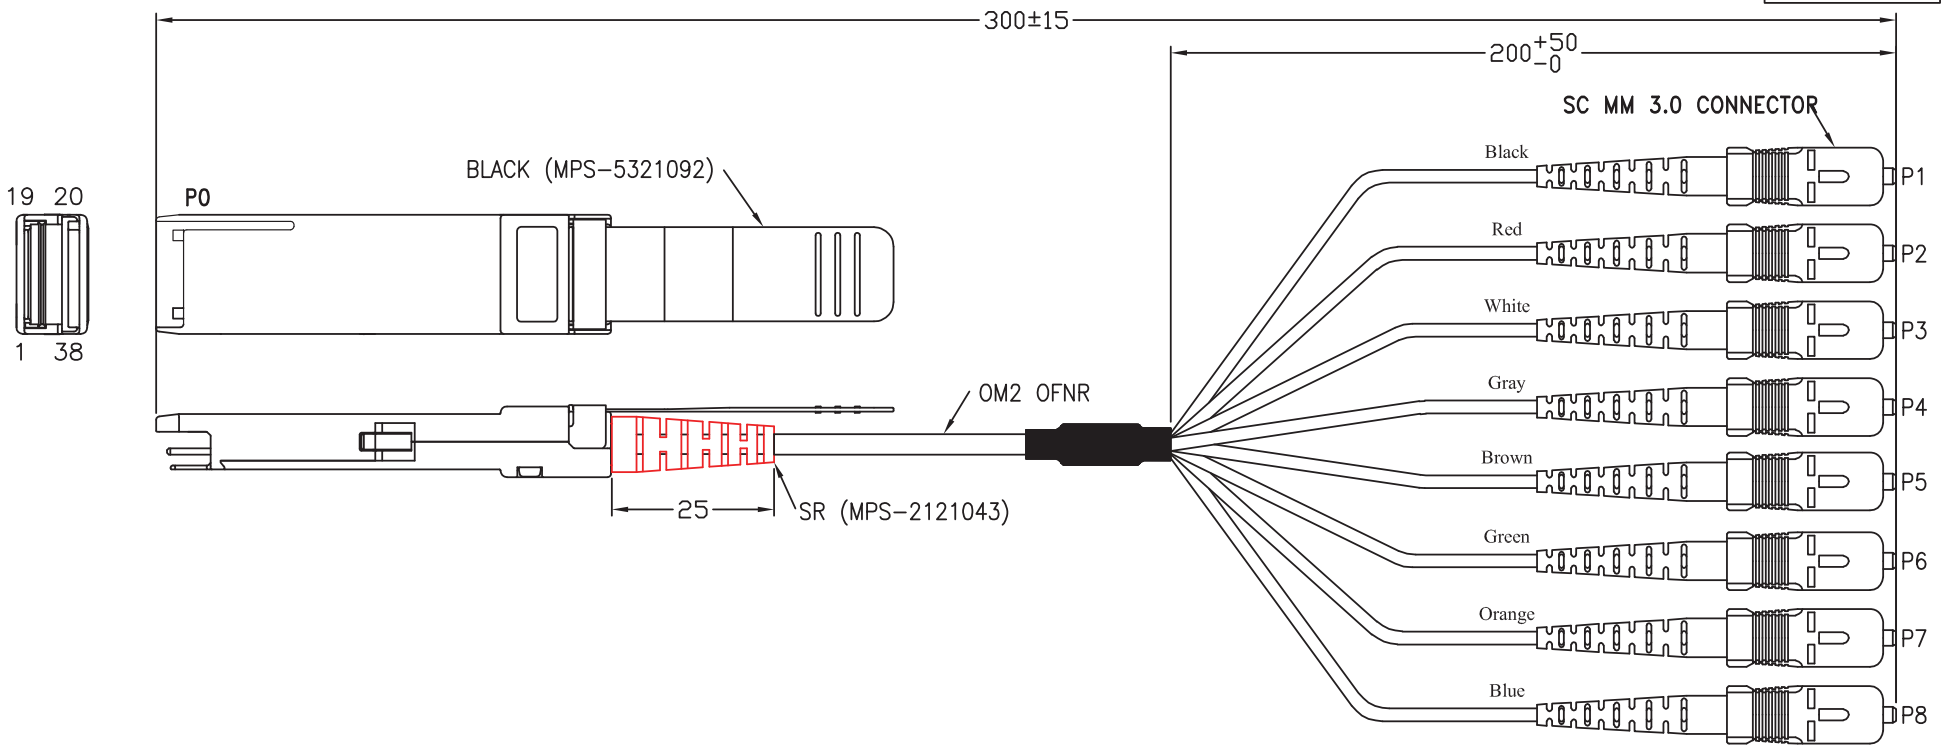

MATERIAL RoHS COMPLIANT:

1.CABLE: OM2 OFNR

(1) Core Diameter: 50.0 ± 2.5 um

(2) Cladding Diameter: 125 ± 1.0 um

(3) Coating Diameter: 245 ± 5 um (colored)

(4) 850nm Performance: 10 Gb/s over 150 meters

(5) Cable Diameter: 3.0 ± 0.2 mm, Color Orange

2.CONNECTOR:

P0: 4x-Pluggable-QSFP(SFF-8436)

(1) P.C.B: 4 LAYERS, GOLD PLATING ON CONTACT PADS.(MOT-QSFP40-001)

(2) LATCH: STAINLESS STEEL WITH PULL TAB, COLOR: BLACK.(MPS-5321092)

(3) BACKSHELL: ZINC DIE CASTING HOOD/ NICKEL PLATING. (MMT-03016321TS/MMT-03016321BS)

P1-P8: MT/F-SC 50/125 ROUND CORD

Black
Red
White
Gray
Brown
Green
Orange
Blue

Sierra Technologies, LLC		QSFP/SC*8 Cable Assembly								*		mm				