



LTR	REV.	DESCRIPTION	DATE
▲*4	III	EDIT TOOLING, TEST & ADD SHIELD	10/23/05'

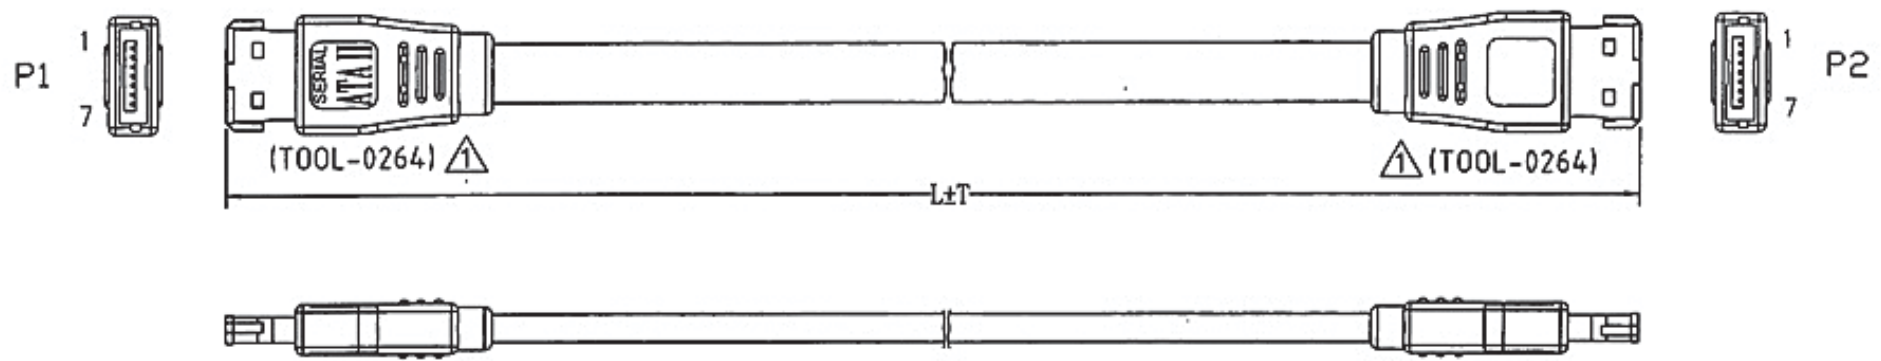

- NOTE:**
- CABLE:UL2725 [26AWG(1/0.404)×2F INS:HD-PE ID:1.3×2.7+DRAIN WIRE 28AWG(1/0.32)×2C+AL/MY]×2C INNER JACKET:PVC OD:7.3×2.1mm +AL/MY+BRAID(16/10/0.1)PVC JACKET, COLOR: BLACK(NK-K01), OD:9.0×4.0mm, IMPEDANCE: 100 OHM.
 - CONNECTOR:
P1&P2:SATA II 7P RIVETING TYPE PBT BLACK G/F W/METAL SHELL
 - SHIELD:COPPER-FOIL
 - HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)
 - TEST REQUEST:
100% OPEN SHORT MIS WIRE TEST
CONTACT RESISTANCE 3 ohm MAX.
INSULATION RESISTANCE 10M ohm MIN.
HI-POT DC300V/0.01SEC.
 - PACKING:EACH PC / POLYBAG

PIN ASSIGNMENT

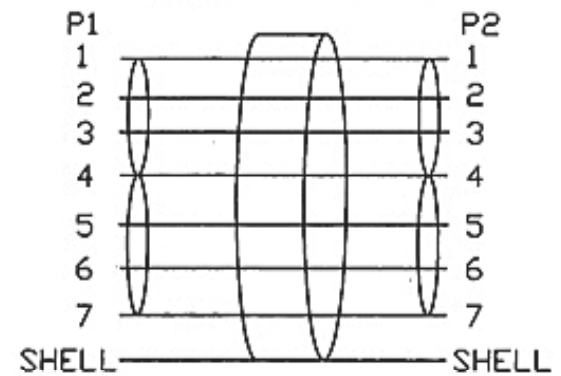

140-1215-2	2000	50
140-1215-1	1000	50
DWG	L(mm)	T(mm)

Tolerance Inch M/M			Sierra Technologies		
.X	.015	.30	Title		
.XX	.010	.10	SERIAL ATA II SINGAL EXTERNAL CABLE.		
.XXX	.005	.05	Customer P/N eSA/x		
Draw FANNIE 10/23/05'			App'd		
Check			Customer:		
Engr			Scale	NONE	Units
			m/m	Third Angle Projection	☉
			Dwg No. 140-1215	REF:III	Sheet 1/1