

Ultra320 SCSI Host Adapter

Model P79320

For Workstations, Servers, Power Users

- *320 MByte/second throughput*
- *Multimode LVD/MSE*
- *32- or 64-bit (up to 133 Mhz)
DMA bus master PCI, PCI-X*
- *Supports SCSI-1, Fast SCSI, Ultra,
Ultra2, Ultra3 (U160), Ultra4 (U320)*
- *Auto Termination*
- *SureLINK™, LVDlink™, TolerANT™*
- *Supports SCSI Boot Drive*


Paralan's P79320 is a high-performance, 320 MBytes/s Host Bus Adapter, ideal for high-end workstations, servers, and power users.

The P79320 is a very easy-to-install SCSI solution. Complete software tools are provided and there are no jumpers or switches to set for a standard installation. The termination programming is automatic. The P79320 features seamless backward compatibility with Asynchronous, Slow, Fast, Ultra, Wide Ultra, Ultra2 and Ultra3 devices.

Your satisfaction is assured by Paralan - the world's #1 choice for SCSI enhancement products.



Made in USA

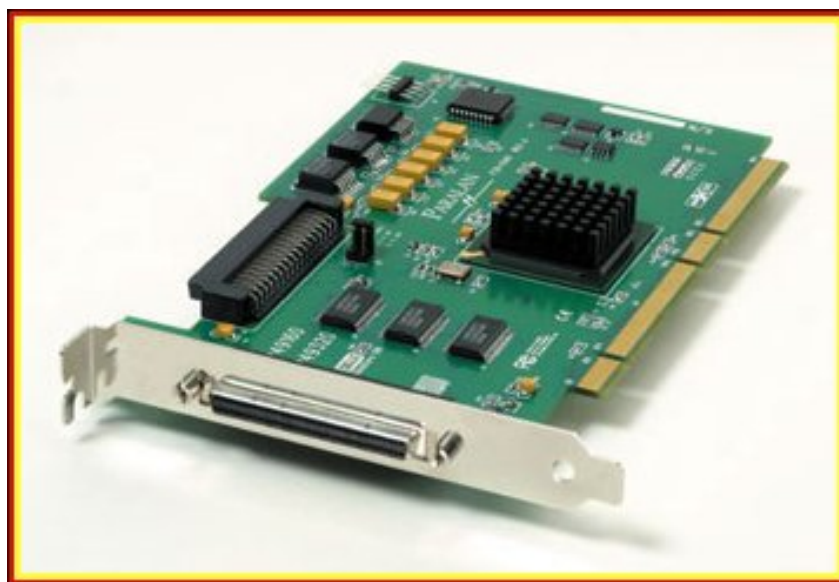

Paralan's P79320 Host Bus Adapter

OEM Custom Inquiries Welcome

The P79320 incorporates the LSI 53C1020 controller which provides many benefits including:

SureLINK™ is the control for Ultra320 SCSI Domain Validation manageability enhancements in the LSI 53C1020. This is the very latest SCSI interconnect management solution. It verifies that the system is capable of transferring data at Ultra320 speeds, allowing it to negotiate to lower speed and bus width if necessary.

LVDlink™ Technology Benefits:

The P79320 supports LVD, a signaling technology that increases reliability of SCSI data transfers over longer distances than are supported by Single-ended (SE) SCSI. The low power requirement of LVD allows the I/O transceivers to be integrated directly onto the ASIC. LVDlink™ technology lowers the amplitude of noise reflections and allows higher transmission speeds. LVD provides a long-term migration path to even faster SCSI transfer rates without compromising signal integrity, cable length, or connectivity.

TolerANT™ Technology Benefits:

TolerANT™ technology includes active negation on the SCSI drivers and input signal filtering on the SCSI receivers.

The benefits of TolerANT™ technology include increased noise immunity when the signal transitions to HIGH, better performance due to balanced duty cycles, and improved SCSI transfer rates.

Status LEDs for System Information

The Paralan Host Bus Adapter (HBA) includes three LEDs on the board to provide system information. The "Bus Activity" LED blinks with bus activity. This can often be used along with LEDs on drives or SCSI expanders to diagnose the location of a problem. This LED includes header pins that may be used to power a remote LED.

The HBA Terminator Status LED illuminates when the terminator on the HBA is enabled. This provides the user information on correct termination of the SCSI bus.

The HBA Board Status LED provides an indication of the status of the HBA. When the board is working correctly this LED blinks on/off on a 1 to 2 second cycle. If the board detects a problem this LED blinks a series of long and short pulses. If the LED does not blink at all, it has detected a major problem.

SPECIFICATIONS:

Communication:

Parallel data transmission rate
(sustained): 320 Mbytes/sec (16 bit)

SCSI Devices Supported: 16

Bus

32- or 64-bit PCI DMA bus master
(up to 133 MHz)

Single Channel

Multimode LVD/MSE interface

Dimensions:

7.00 inches x 4.25 inches (17.8 cm x
10.8 cm) Short PCI Board

Device Support:

OBDR (tape booting) and bootable
CD-ROM

General Characteristics:

Data Protection:

CRC and AIP

supports LVD (up to Ultra320) or
Single-Ended (up to Ultra)

Domain Validation

Connectors:

68-pin High-Density (Alt 3, "P"
Connector) internal and external

SureLINK™

Domain Validation Management

Termination:

Automatic or Manual

MTBF:

500,000 Hours

Regulatory Compliance:

CE, FCC class B

Term Power Manager:

Auto Resetting integrated circuit
breaker with thermal shut down

Power:

5 V dc \pm 5% @ 3A from PCI bus

Status LEDs:

Bus Activity, HBA Terminator Status,
HBA Board Status

Operating Temperature:

0-50°C

Compliance:

PCI 2.2, PCI-X Addendum 1.0a
SCSI X3T10

Storage Temperature:

-25° to +75°C

Utilities:

Install, Flash, SCSI format, BIOS
configuration, and NT configuration

Humidity:

Relative Humidity: 5-95% non-
condensing

Warranty:

Five Years

Weight:

0.25 lbs (0.1kg); 2 lbs. (1kg)
shipping

For complete dimensions [see outline
drawing.](#)

OEM Custom Inquiries Welcome

~ Product specifications subject to change without notice ~

SOFTWARE SUPPORT:

WINDOWS NT® 4.0, SP4 and above, 2000, 2000 SP1 and XP PRO
SUN SOLARIS® versions 2.7 and greater, Open Boot PROM version 3.0 and greater
SOLARIS® x86 versions 2.6, 2.7 and 2.8
LINUX® 2.2 and 2.4 kernels
UNIXWARE® 7.1.x
OPEN UNIX 8
SCO UNIX® 5.x

Model Number	Description
P79320-1	Ultra320 Single channel LVD/MSE SCSI Host Bus Adapter for PCI bus. Includes CD, 5 connector ribbon cable, terminator, User Manual and Quick Start Guide.
P79320-2	Ultra320 Single channel LVD/MSE SCSI Host Bus Adapter for PCI bus. Includes Quick Start Guide only.
	For quantity purchases contact Paralan

Options	Description
4543	Internal ribbon cable with 5 connectors for P79320-2 HBA
4947	LVD/MSE Terminator for P79320-2 HBA

To proceed with a purchase we will need the following information

(Both fields need to be filled out!)

After filling out the form you will be taken to a Paypal secure server.

* **Sales outside the United States or Canada:** Contact Paralan to place your order as we are unable to accept your order online at the present time.

Name:

(Area Code) and Phone #:

Paralan Corporation
4655 Ruffner Street
San Diego, CA 92111
Tel.: (858) 560-7266
Fax: (858) 560-8929
E-mail: scsi@paralan.com

Paralan GmbH
Technik InnovationsPark, Postfach 10-31
D-85501 Ottobrunn, Germany
Tel.: +49-89 607-30875
Fax: +49-89 607-32041
E-mail: scsi@paralan.de